


Gauge	1/10	
Manufacturing	C.O.C.	
Pile description	PP Twistex	
Primary backing	Woven	
Pile weight	750 gr/m <sup>2</sup>	
Number of tufts	181.102 /m <sup>2</sup>	
Secondary backing	Actionback	Impervious gel backing
Width	400 cm	400 cm
Total weight	1650 gr /m <sup>2</sup>	1880 gr/m <sup>2</sup>
Total height	7 mm	7 mm
Pile In/Out	In	OUT
Roll length	30 m	30 m
DOP	1087#685/END/ZI	1087#685/END/C
Fire classification	Cfl-s1	Efl
Use classification	32	31
TOG rating	0,9	0,7


Available colours	Actionback   400 cm	140   141   158   224   330   446   455   887   890   962
	Impervious gel backing   400 cm	140   141   158   224   330   446   455   887   890   962

Colour legend	140 Ash	141 Black	158 Anthracite
	224 Jade	330 Beige	446 Port
	455 Rustic Red	887 Oriental Blue	890 Marine
	962 Teak		



These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to modify technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching can not be guaranteed. In cut-pile carpeting, in rare cases, shading/pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet.



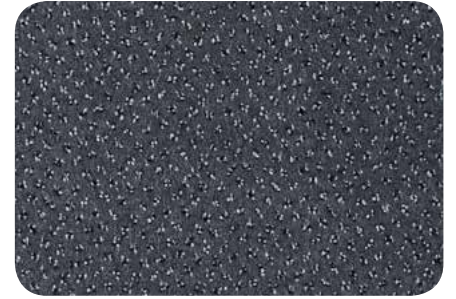

140 - 400 cm



141 - 400 cm



158 - 400 cm



224 - 400 cm



330 - 400 cm



446 - 400 cm



455 - 400 cm



887 - 400 cm



890 - 400 cm



962 - 400 cm